



Assessing Musculoskeletal Disorder Risks in an Automobile Part Manufacturing Factory: A Comparison Study of Biomechanical and Ergonomic Tools

Abouzar Eynipour ¹, Navid Arjmand ², Iman Dianat ³, Ali Reza Soltanian ⁴, Rashid Heidarimoghadam ^{1,*}

¹Department of Ergonomics, Research Center for Health Sciences, School of Public Health, Hamadan University of Medical Sciences, Hamadan, Iran

²Department of Mechanical Engineering, Sharif University of Technology, Tehran, Iran

³Department of Occupational Health and Ergonomics, Faculty of Health, Tabriz University of Medical Sciences, Tabriz, Iran

⁴Department of Biostatistics, Research Center for Health Sciences, School of Public Health, Hamadan University of Medical Sciences, Hamadan, Iran

*Corresponding author: Department of Ergonomics, Research Center for Health Sciences, School of Public Health, Hamadan University of Medical Sciences, Hamadan, Iran.
Email: dr_haidari@yahoo.com

Received 2023 August 5; Revised 2024 January 20; Accepted 2024 February 19.

Abstract

Background: Various tools and methods are available to assess the risk of musculoskeletal injuries in occupational settings, each considering different assessment criteria. While these methods have been previously studied, further comparative investigations are still needed.

Objectives: This study aimed to assess the risk of musculoskeletal disorders (MSDs) in workers performing various tasks using different ergonomic and biomechanical risk assessment tools and to compare the outcomes of these tools.

Methods: This analytical and cross-sectional study was conducted in a sector of the SAIPA Automobile Part Manufacturing Factory in Iran. A total of 33 workers engaged in lifting, grinding, pushing, and lowering activities participated. Lifting activities involved handling parts weighing 36, 7.9, and 3.4 kg at three workstations. In total, six tasks were examined, and workers' discomfort levels were evaluated using the Cornell Musculoskeletal Discomfort Questionnaires (CMDQ). Fourteen biomechanical and ergonomic risk assessment tools were utilized and compared. Kendall's tau-b correlation coefficient and Cohen's kappa agreement coefficient were applied to determine relationships between different tools and to match the measurement of risk levels, respectively. Additionally, the mean and standard deviation of the data were calculated.

Results: There was a high positive correlation between the outcomes of three biomechanical tools [3D static strength prediction programTM (3DSSPP), hand-calculation back compressive force (HCBF), and JACK], with 3DSSPP and HCBF being interchangeable for estimating lumbar spine loads. Ergonomic assessment tools showed a suitable correlation in assessing load-carrying tasks. Manual handling assessment charts (MAC) had perfect agreement with National Institute for Occupational Safety and Health (NIOSH), and SNOOK with Washington Industrial Safety and Health Act (WISHA). Among body posture evaluation methods, rapid upper limb assessment (RULA) and rapid entire body assessment (REBA) had the highest correlation. Lifting fatigue failure tool (LiFFT) correlated well with manual handling methods, and survival chance correlated better with body posture evaluation methods. Lowering activities were identified as the most hazardous.

Conclusions: Ease of use and accuracy are key considerations when selecting biomechanical risk assessment tools. Experienced assessors can effectively utilize JACK, 3DSSPP, and HCBF. The MAC and NIOSH, as well as RULA and REBA tools, are interchangeable. Selecting appropriate tools requires consideration of their limitations and advantages.

Keywords: Risk Assessment, Biomechanical Tools, Ergonomic Methods, Musculoskeletal Disorders (MSDs)

1. Background

Musculoskeletal disorders are a prevalent issue in industries, particularly in industrial machining (1, 2), and they account for a significant proportion of disabilities (3). Various factors contribute to these disorders. Excessive force, improper body posture, repetitive activities, vibration, and psychosocial factors are identified as major risk factors (4). Assessing exposure to work-related musculoskeletal disorders

(WMSDs) is crucial for protecting workers in industries from the increasing prevalence of WMSDs (5).

There are various tools and methods to assess the risk of musculoskeletal injuries, each considering different factors for their assessments. For example, load weight is significant in manual material handling (MMH) methods, while the degree of body deviation from a neutral posture is critical in body posture assessment methods (6). When selecting ergonomic assessment methods and tools, practitioners must consider several

aspects, including the objectives of the assessment, the level of detail assessed, available resources, and the applicability of the assessment program (7). Once risk factors are identified, practitioners may employ multiple similar assessment methods to achieve more accurate results. This approach facilitates risk prioritization and a more precise identification of the factors influencing risk (7, 8). These methods include self-reports, observation, and direct measurements. While direct methods offer considerable accuracy, observational methods are more commonly used (9).

The applicability of methods and tools varies, and no single method can comprehensively apply to all work situations. Industrial activities are typically complex, and assessing these activities necessitates the use of appropriate tools and methods. Although these evaluation methods have been previously studied, there remains a need for further investigation (10) by comparing their outcomes (11).

Ergonomic methods include the quick exposure check (QEC) (12) and the rapid entire body assessment (REBA) (13) to assess risks across the whole body, the rapid upper limb assessment (RULA) (14) for the upper limbs, and the strain index (15) for the distal upper extremities. Manual handling assessment charts (MAC) (16) liberty mutual manual materials handling tables (Snook tables) (17), the National Institute for Occupational Safety and Health (NIOSH) lifting equation (18), the Washington Industrial Safety and Health Act (WISHA) (19, 20), the key indicator method for pulling and pushing (KIM-PP), and the key indicator method for lifting, holding, and carrying (KIM-LHC) (21) are utilized to assess the risk of injury during MMH activities. In all these tools, intensity is considered, but some do not account for duration and frequency, which are critical in assessing occupational exposure (22). These methods, based on observational techniques, offer practical advantages such as being low-cost, easy to learn, user-friendly, and applicable in various work environments. Body posture and tasks are often determined using photographic techniques (23-25). These are among the most widely used methods (6) in industries. However, if an inappropriate method is used to assess the risk factor of musculoskeletal disorders, it may yield varying results and risk levels (26). Ergonomic methods have been developed with different objectives and vary in the area of the body evaluated or in the risk factors examined (27).

In recent years, the use of digital human models in industries has increased when applying ergonomic methods (28). Biomechanical tools can estimate the loads exerted on body joints and muscles, providing

quantitative results to users (29, 30). The University of Michigan's 3D static strength prediction program™ (3DSSPP) (31) and JACK SIEMENS (32) software are capable of estimating spine loads. These tools typically utilize body mass and joint locations as inputs to calculate intervertebral disc loads (33). The hand-calculation back compressive force (HCBCF) equation estimates lumbosacral (L5-S1) compression load in MMH tasks (34). Researchers have linked occupational back pain to fatigue failure in lumbar vertebrae, leading to the development of the lifting fatigue failure tool to predict cumulative loads in the lumbar area (35). Additionally, the survival chance tool (36) offers a suitable measure of cumulative spinal compression loading. Examining workplace conditions is one of the primary advantages of biomechanical risk assessment tools (37), which can significantly reduce musculoskeletal disorders (38). Using these tools allows adjustments based on nationality, anthropometric dimensions, and even the sex of workers while assessing the risk of musculoskeletal disorders (39). Through biomechanical simulations, it is possible to prevent musculoskeletal disorders and reduce compensation and work absenteeism, thus effectively lowering costs. The disadvantages of these tools include the need for specialized training, licensing costs, and the installation process (40), while most biomechanical tools only analyze static postures (41, 42). Biomechanical tools are based on models that calculate joint loads, whereas ergonomic methods mainly rely on experimental studies (43).

One of the significant differences between ergonomic and biomechanical tools is their ability to assess the risk of injury (39). The methods that are widely used and suitable for the selected activities are considered in this study (19). Previous studies have compared methods and tools based on general characteristics such as correspondence with a valid reference, criteria for posture classification, association with MSDs, inter-observer repeatability, and exposure factors assessed like postures or body regions, force, and movement repetition (4, 6, 44, 45). Additionally, some studies have compared methods and tools based on outcomes and have been limited to specific methods (46, 47). A key question is whether different tools can be used interchangeably. Any measurement tool used must possess properties that accurately and precisely measure the target. It is possible to apply biomechanical tools across different industries. Since ergonomic methods are developed based on empirical studies in specific industries or organizations, their applicability in other industries or organizations has always been a

subject of research. If applicable, what results would be obtained? Employing statistical tests and comparing the results of tools with similar applications could be helpful.

2. Objectives

The primary objective of this study was to compare the methods and tools for assessing the risk of musculoskeletal disorders. Consequently, the risk of musculoskeletal disorders for selected tasks was determined using these tools and methods, and the correlation and agreement between the results of different tools and methods used for each activity was calculated.

3. Methods

3.1. Tasks and Context of Study

This analytical and cross-sectional study was conducted in 2023 within a specific sector of the SAIPA Automobile Part Manufacturing Factory in Iran. Our survey indicated that 72% of workers in this sector reported discomfort in at least one body area, according to the Cornell Musculoskeletal Discomfort Questionnaires. Consequently, all activities in this sector were assessed using various tools and methods. Each worker's activity cycle was meticulously observed and recorded through filming, with dangerous tasks and postures being identified. After casting, parts were transferred to this sector for grinding and cleaning. The activities performed included lifting, grinding, pushing, and lowering. Lifting involved handling parts weighing 36, 7.9, and 3.4 kg at three different workstations. A total of six tasks from six workstations were examined, with each part typically lifted by one worker. The 3.4 kg pieces were moved in pairs, while other pieces were moved individually on the conveyor roller. The pieces were then pushed to the next station, where grinding operations took place, followed by the worker lowering the pieces (Figure 1).

3.2. Data Collection

Data were collected from six workstations involving 33 workers. Each participant first completed an informed consent form and provided essential information such as height and weight. The next step involved analyzing the participants' movements. Due to industry limitations, only photography was feasible for recording movements. The photos were analyzed using Digitizer software, where necessary angles and distances

were estimated. The force involved in the pushing activity was calculated using the Danesh Salar Push&Pull and Lutron FG 5020 Force Gauges. Information regarding the time and frequency of work was gathered from daily statistics. Risk assessments were then conducted based on these data. This study received approval from the Ethics Committee of Hamedan University of Medical Sciences (Iran) and adhered to the protocols of both the company and the Ethics Committee.

3.3. Assessment Tools

This industry prioritized risk assessment for six tasks with the potential for musculoskeletal disorders. For this purpose, fourteen tools were used and compared. Biomechanical assessments utilized recorded field data, segmental angles from motion analysis, and the anthropometric dimensions of subjects. Notably, the HCBCF, MAC, NIOSH, and WISHA methods are not designed to evaluate pushing activities; thus, this activity was assessed using other specified methods and tools. The QEC method was employed separately to calculate and compare both load-carrying and non-load-carrying tasks. Asymmetric tasks were analyzed for critical postures using the RULA and REBA methods. While the QEC, RULA, and REBA methods were primarily developed for posture analysis, they were also applied to assess the increase in applied force and improper posture due to load-carrying activities. The tools used included:

3.3.1. 3D Static Strength Prediction Program

This program predicts compression and shear loads imposed on the L4-L5 and L5-S1 intervertebral discs using subjects' anthropometric dimensions, joint angles relative to each other, and the load's position relative to the body (31, 48).

3.3.2. JACK SIEMENS

Similar to 3DSSPP, this tool predicts L4-L5 compression and shear loads based on subjects' anthropometric dimensions, joint angles, and load positions (32, 49).

3.3.3. Hand-Calculation Back Compressive Force Equation

The HCBCF equation estimates L5-S1 compressive loads using five variables: Subjects' height and weight, the weight of the hand load, the distance between the



Figure 1. Worker's posture during (1, 3, 4) lifting; (2) grinding; (5) pushing; and (6) lowering activities

hands and the waist, and the trunk angle in the sagittal plane (34).

3.3.4. Manual Handling Assessment Charts

This tool provides an ultimate score using variables such as load weight/frequency, load distance from the body, load vertical height, rotation and bending, lifting with restricted posture, coupling, surface conditions, environmental factors, distance to move the load, path obstacles, and cooperation between subjects (16).

3.3.5. Snook Tables

These tables are designed separately for lifting, lowering, pushing, pulling, and load-carrying tasks. Based on psychophysical data, they consider factors such as the width of the object, distance of lift, and lifting zone (17). They determine the maximum acceptable load for manual materials handling tasks and provide the maximum acceptable weight and force for analysis and population percentiles.

3.3.6. National Institute for Occupational Safety and Health

This method takes into account several factors to determine the recommended weight limit for lifting (18). These factors include the constant load, horizontal and vertical positions of the hands, vertical displacement of the load, angle of asymmetry, repetition of lifting, and quality of hand-coupling. The load-lifting index (LI) is then calculated based on this recommended weight limit and the actual load weight.

3.3.7. Washington Industrial Safety and Health Act

The WISHA Lifting Calculator is a straightforward method that applies NIOSH multipliers to estimate the LI (19, 20). It considers factors such as the hand position at the start of lifting (both vertical and horizontal), frequency, duration, and body twist. However, this method does not account for the vertical travel distance of the load or the hand-to-load coupling.

3.3.8. Key Indicator Method

The KIM-LHC is designed for lifting, holding, and carrying, whereas the KIM-PP is for pulling and pushing tasks (21). For KIM-LHC, factors such as force, repetition, duration, posture, distance between the load and the body, and working conditions are considered. For KIM-PP, load weight, repetition, pulling/pushing speed, posture, and working conditions are assessed.

3.3.9. Strain Index

The strain index is used to determine the risk of upper limb musculoskeletal disorders (15). It evaluates the risk level of a job by considering the intensity and duration of exertion, efforts per minute, hand/wrist posture, work speed, and duration of the task per day.

3.3.10. Rapid Upper Limb Assessment

This method provides a final score when assessing a task (14). It divides the body into two groups for examination and considers body posture, force, static conditions, and repetition of activity as risk factors. The right and left sides of the body are assessed separately.

3.3.11. Rapid Entire Body Assessment

Developed to assess risks of musculoskeletal disorders across the whole body, REBA takes into account the quality of hand-coupling (13). Like RULA, it examines the right and left sides of the body separately.

3.3.12. Quick Exposure Check

Quick exposure check is a rapid risk assessment method for musculoskeletal disorders (12). It calculates scores for body segments and the whole body using worksheets for the observer and the person being evaluated. This method considers body posture, activity repetition, duration, load weight (if carrying), and psychological factors.

3.3.13. Lifting Fatigue Failure Tool

Lifting fatigue failure tool (LiFFT) estimates fatigue failure by considering factors such as load weight, the maximum horizontal distance from the spine, and the number of repetitions (35).

3.3.14. Survival Chance

This tool, developed using a nonlinear approach, estimates survival probabilities based on load

magnitude and the number of cycles (36).

The ergonomic methods reviewed have various tables and final scores for determining the risk level and prioritizing corrective actions. Therefore, in both ergonomic methods and biomechanical tools, the results were classified into three risk levels (low risk, moderate risk, and high risk) to facilitate relevant comparisons (50, 51) (Table 1).

Table 1. Classification of Ergonomic Methods and Biomechanical Tools

Tools	Original Number of Action Categories	After Classification		
		Low Risk	Moderate Risk	High Risk
Biomechanical tools				
Compression	3	<3400	3400 - 6400	>6400
Shear	3	<500	500 - 1000	>1000
MAC	4	0 - 4	5 - 12	13 - 20
SNOOK (%)	-	>90	75 - 90	<75
NIOSH	4	LI ≤ 1	1 < LI ≤ 3	LI > 3
WISHA	2	LI < 1	1 ≤ LI < 1.5	LI ≥ 1.5
KIM	4	<10	10 - 50	≥ 50
Strain index	4	SI < 3	3 ≤ SI < 7	SI ≥ 7
RULA	4	1 - 2	3 - 6	≥ 7
REBA	5	1	2 - 7	8 - 15
QEC (%)	4	< 40	≥ 40 - < 70	≥ 70
LiFFT (%)	3	< 25	25 - 50	≥ 50
Survival chance (%)	-	> 75	50 - 75	≤ 50

3.4. Risk Assessment Calculation and Statistical Analysis

Tasks were assessed using both biomechanical tools and ergonomic methods to determine the risk of musculoskeletal disorders. Statistical analyses were performed using SPSS version 26. Given the qualitative tool measurement scale used in this study, Kendall's Tau-b correlation coefficient was utilized to assess tool validity, and the kappa coefficient was applied to evaluate tool reliability (52). Kendall's Tau-b correlation coefficient measures the degree of correlation between the risk levels obtained from one tool and those obtained from another, determining whether one tool could replace another. The kappa coefficient assesses whether both tools consistently report a worker at risk levels 1, 2, or 3. Additionally, the mean and standard deviation of the data were calculated.

4. Results

Data were collected from six workstations. Among the biomechanical tools, the lowering activity (task 6) was identified as the most hazardous, where the maximum compression load was exerted on the L4-L5 disc. The JACK tool predicted the highest compression

Table 2. Comparisons Between Biomechanical Assessment (Lower Back) Tools in Different Tasks

Tasks and Load Weight ^a	Mean and Standard Deviation of Participants		Tools	Inter-vertebral Disc Force (N)				
	Height (cm)	Weight (kg)		L4-L5		L5-S1		
				Compression	Shear	Compression	Shear	
Task 1 (6.8 kg) (n = 6)	175 ± 5	75 ± 13	3DSSPP	2988 ± 402	433 ± 67	3214 ± 438	428 ± 63	
			JACK	3047 ± 411	900 ± 115	-	-	
			HCBCF	-	-	3300 ± 460	-	
Task 2 (3.4 kg) (n = 6)	175 ± 7	79 ± 14	3DSSPP	999 ± 111	170 ± 22	1089 ± 124	272 ± 36	
			JACK	1135 ± 152	239 ± 31	-	-	
			HCBCF	-	-	938 ± 106	-	
Task 3 (7.9 kg) (n = 6)	171 ± 5	72 ± 11	3DSSPP	2946 ± 338	420 ± 58	3202 ± 377	422 ± 55	
			JACK	3003 ± 349	886 ± 99	-	-	
			HCBCF	-	-	3374 ± 377	-	
Task 4 (36 kg) (n = 6)	178 ± 3	81 ± 10	3DSSPP	4459 ± 176	788 ± 53	4923 ± 205	744 ± 49	
			JACK	6107 ± 294	1683 ± 85	-	-	
			HCBCF	-	-	5922 ± 320	-	
Task 5 (35 kg) (n = 3)	177 ± 6	80 ± 2	3DSSPP	2543 ± 90	5 ± 5	2574 ± 94	79 ± 7	
			JACK	2955 ± 105	289 ± 20	-	-	
			HCBCF	-	-	-	-	
Task 6 (36 kg) (n = 6)	175 ± 2	78 ± 5	3DSSPP	5599 ± 191	732 ± 28	6047 ± 212	727 ± 27	
			JACK	6753 ± 227	1808 ± 57	-	-	
			HCBCF	-	-	5786 ± 236	-	

^a1, 3, and 4: Lifting; 2: Grinding; 5: Pushing; and 6: Lowering activities; n, number of participants evaluated.

load on the L4-L5 disc. The lowest disc force was observed in task 2 (grinding activity). The 3DSSPP and HCBCF tools did not classify any activities as high-risk, while JACK indicated L4-L5 shear force in 18.2% of subjects and L4-L5 compression force in 45.5% of subjects as being in the high-risk zone. In the pushing task, average compression and shear loads were predicted to be in the low-risk zone (Table 2 and Figure 2).

Both lifting (task 4) and lowering (task 6) tasks were identified as high-risk by all methods (Table 3). The MAC and NIOSH methods categorized 20% of tasks as low-risk, 40% as moderate-risk, and 40% as high-risk. Snook's tables indicated that 54.5% of the tasks were low-risk and 45.5% were high-risk. The WISHA method identified 60% of tasks as low-risk and 40% as high-risk, KIM categorized 63.6% as moderate-risk and 36.4% as high-risk, the strain index (SI) found 9.1% of tasks as low-risk, 42.4% as moderate-risk, and 48.5% as high-risk, RULA identified 27.3% as moderate-risk and 72.7% as high-risk, REBA indicated 18.2% as moderate-risk and 81.8% as high-risk, and QEC identified 54.5% as moderate-risk and 45.5% as high-risk (Figure 2).

The LiFFT tool classified 3% of tasks as low-risk, 51.5% as moderate-risk, and 45.5% as high-risk, while the survival chance tool classified 24.2% of tasks as low-risk, 9.1% as

moderate-risk, and 66.7% as high-risk (Table 4 and Figure 2).

Results showed that, with the exception of the correlation coefficient between QEC and RULA, other correlation coefficients between different tools were statistically significant. According to Table 5, results from the Kendall-Tau-B correlation coefficient indicated that 3DSSPP had a very high correlation (91.3%) with JACK in estimating the L4-L5 compression force. Additionally, 3DSSPP had a very high correlation (87.7%) with JACK in estimating the L4-L5 disc shear force. There was a perfect correlation (1.0) between 3DSSPP and HCBCF in estimating the compression force of the L5-S1 disc. Among the ergonomic tools for MMH, there were very high correlations between the tools. A perfect correlation was observed between the MAC/NIOSH, SNOOK/WISHA, and WISHA/KIM methods. In body posture assessment methods, the highest correlation was between RULA/REBA (77.0%), and the lowest was between RULA/QEC (14.9%) (Table 6).

Statistically, all correlation coefficients, except for the one between RULA and LiFFT, showed significant relationships. Results from the Kendall-Tau-B correlation coefficient demonstrated that LiFFT had the highest correlation with MMH methods. It had the lowest correlation with the KIM method (80.3%) and the

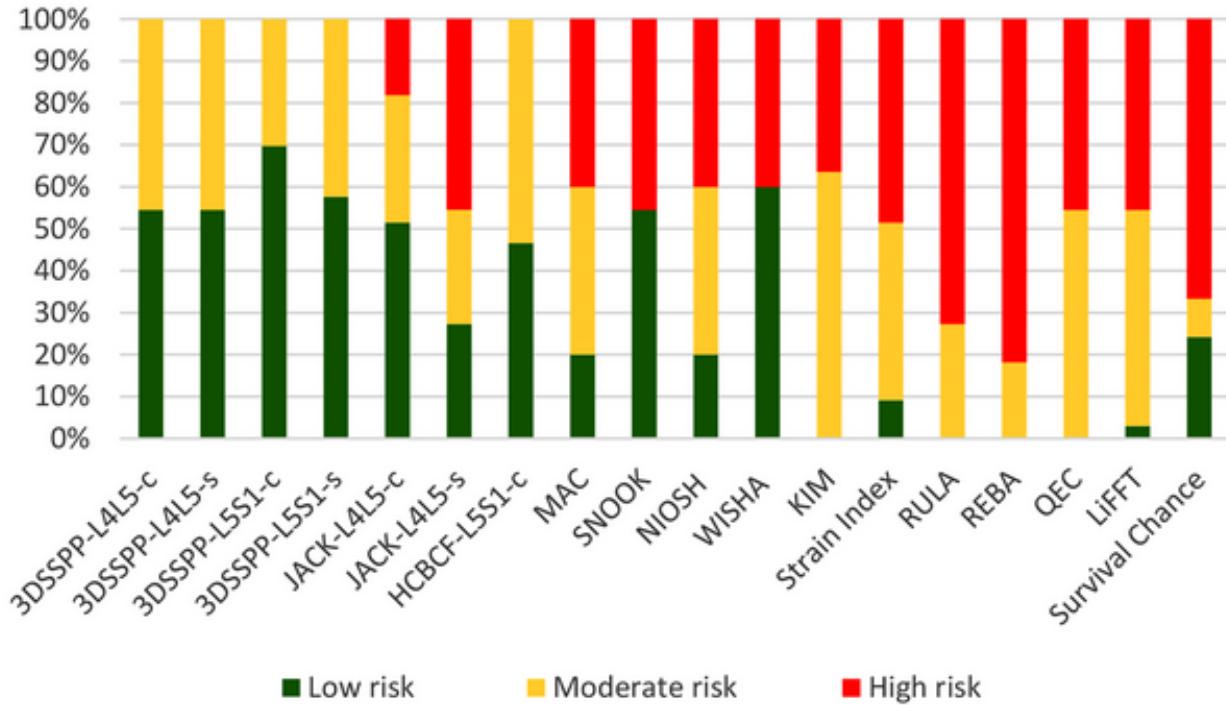


Figure 2. Results of the risk assessment tools and methods in classifying the risk of the investigated tasks (percentage)

Table 3. Comparisons Between Ergonomic Assessment Tools in Different Tasks ^{a,b}

Tools	Task 1	Task 2	Task 3	Task 4	Task 5	Task 6
MAC	12 ± 0	2.17 ± 0.4	12 ± 0	17.8 ± 0.4	-	19 ± 0
SNOOK (%)	90 ± 0	90 ± 0	90 ± 0	10 ± 0	42 ± 2	10 ± 0
NIOSH	1.63 ± 0.01	0.44 ± 0.01	2.68 ± 0.02	6.79 ± 0.12	-	7.3 ± 0.27
WISHA	0.65 ± 0	0.42 ± 0	0.76 ± 0	2.4 ± 0	-	3.46 ± 0
KIM	48 ± 0	19 ± 2.4	48 ± 0	72 ± 0	36 ± 0	96 ± 0
Strain index	3.5 ± 0.77	3.6 ± 0.75	7.7 ± 1.99	11.0 ± 2.28	1.8 ± 0.64	14.5 ± 2.44
RULA	7 ± 0	6 ± 0	7 ± 0	7 ± 0	5 ± 0	7 ± 0
REBA	10 ± 0	5 ± 0	9 ± 0	11 ± 0	10 ± 0	11 ± 0
QEC (%)	68.3 ± 1	59.7 ± 3	68.9 ± 0.9	80.6 ± 0.8	73.3 ± 2.3	82.5 ± 1.6

^a 1, 3, and 4: Lifting; 2: Grinding; 5: Pushing; and 6: Lowering activities.

^b Values are expressed as mean ± SD.

highest correlation with SNOOK's method (97.0%). Lifting fatigue failure tool also showed a very high correlation (97.0%) with the QEC method but a low correlation with other body posture assessment methods. The survival chance tool displayed the lowest correlation with Snook's method (31.0%) and the highest correlation with NIOSH and MAC methods (72.2%).

Moreover, this tool showed the highest correlation with the RULA method (86.6%) and the lowest with the QEC method (31.0%) (Table 6).

5. Discussion

This study was conducted to compare risk assessment tools and methods for identifying tasks with

Table 4. Assessment Outcomes Using Lifting Fatigue Failure Tool and Survival Chance Tools in Different Tasks ^{a,b}

Tools	Task 1	Task 2	Task 3	Task 4	Task 5	Task 6
LiFFT						
Damage	0.0051 ± 0.00	0.0019 ± 0.00	0.0063 ± 0.00	1.07 ± 0.35	0.03 ± 0.01	1.44 ± 0.25
Probability of high-risk job	35.0 ± 0.5	25.6 ± 0.5	37.1 ± 0.6	84.8 ± 1.8	56.4 ± 3.2	86.7 ± 0.8
Survival chance	35.5 ± 17	92.8 ± 2	37.6 ± 15	-25.5 ± 10	70.4 ± 2	-97.8 ± 13

^a 1, 3, and 4: Lifting; 2: Grinding; 5: Pushing; and 6: Lowering activities.

^b Values are expressed as mean ± SD.

Table 5. Interpretation of Cohen's Kappa Value

Cohen's Kappa Value	Interpretation of Cohen's Kappa Value
0 ≥	No agreement
0.10 - 0.20	Slight agreement
0.21 - 0.40	Fair agreement
0.41 - 0.60	Moderate agreement
0.61 - 0.80	Substantial agreement
0.81 - 0.99	Near-perfect agreement
1	Perfect agreement

the risk of musculoskeletal disorders in a sector of the SAIPA automobile part manufacturing factory.

5.1. Biomechanical Tools

JACK and 3DSSPP estimated that lowering activities exert greater forces on the intervertebral disc, whereas HCBCF did not show a difference between the lowering and lifting tasks (task 4). Furthermore, 3DSSPP and HCBCF assessed the lowering task (task 6) as moderate risk. This may be attributed to the lower sensitivity of these models to asymmetrical activities. Rajaei et al. (48) have recommended that 3DSSPP and HCBCF be used only for symmetric activities. The workers' anthropometric characteristics significantly influenced the disc forces during lifting tasks (tasks 1 and 3). Variations in anthropometric characteristics might explain why, despite the heavier load of task 3 compared to task 1, the force applied to the disc was less in task 3. The grinding activity (task 2) was identified as a low-risk activity. In this task, the force applied to the disc was small compared to other tasks due to the lower load weight, smaller trunk angle, and shorter distance between the hand load and L4-L5 and L5-S1 discs.

Only JACK identified high risk in some tasks (Figure 2). In a comparison between JACK and CATIA, Polášek et al. noted that the Lift-Lower values in JACK were higher, with a difference of about 13% between the two tools.

This discrepancy may result from the more precise settings of inputs in JACK. Another notable difference is in the settings of body part angles, which influence the compressive forces (40). While JACK could accurately analyze the body, manually entering the angles directly into the model proved challenging (53). 3D static strength prediction program and JACK were highly correlated in estimating compressive and shear forces (91.3% and 87.7%, respectively); however, they only showed excellent agreement for the estimated compressive force (68.6%). Additionally, 3DSSPP and HCBCF demonstrated a high correlation and perfect agreement, suggesting that they could be used interchangeably.

5.2. Ergonomic Methods

The load-carrying methods demonstrated a good positive correlation with each other, indicating that an increase in the scores of one method was associated with increases in the scores of the others. The lowest value of the kappa statistic between SNOOK and KIM was 23.8%. There was perfect agreement and correlation between MAC and NIOSH as well as between SNOOK and WISHA. Abedini et al. also noted in their review that MAC and NIOSH are interchangeable (54). National Institute for Occupational Safety and Health and WISHA showed a 44.4% agreement. In Asadi et al.'s study, the kappa value was 0.29% (55). This latter study did not explain the

Table 6. Correlation and Kappa Agreement Coefficients for Risk Level Categories

Paired Methods	Kendall's Tau-b Correlation Value	P-Value	Kappa	P-Value
3DSSPP.L4L5.C/JACK.L4L5.C	91.3	< 0.001 ^a	68.6	< 0.001
3DSSPP.L4L5.S/JACK.L4L5.S	87.7	< 0.001 ^a	00.0	1.00
3DSSPP.L5S1.C/HCBCF.L5S1.C	1.00	< 0.001 ^a	1.00	< 0.001
MAC/SNOOK	86.6	< 0.001 ^a	44.4	< 0.001
MAC /NIOSH	1.00	< 0.001 ^a	1.00	< 0.001
MAC/WISHA	86.6	< 0.001 ^a	44.4	< 0.001
MAC/KIM	86.6	< 0.001 ^a	66.7	< 0.001
SNOOK/NIOSH	86.6	< 0.001 ^a	44.4	< 0.001
SNOOK/WISHA	1.00	< 0.001 ^a	1.00	< 0.001
SNOOK/KIM	82.8	< 0.001 ^a	23.8	< 0.001
NIOSH/WISHA	86.6	< 0.001 ^a	44.4	< 0.001
NIOSH/KIM	86.6	< 0.001 ^a	66.7	< 0.001
WISHA/KIM	1.0	< 0.001 ^a	28.6	< 0.001
Strain index/RULA	64.5	< 0.001 ^a	37.3	0.007
Strain index/REBA	34.6	0.012 ^b	36.6	0.003
Strain index/QEC	39.2	0.035 ^b	61.3	< 0.001
RULA/REBA	77.0	0.001 ^c	74.4	< 0.001
RULA/QEC	14.9	0.380	12.7	0.392
REBA/QEC	43.0	0.003 ^c	31.3	0.013
MAC/LiFFT	88.0	< 0.001 ^a	72.5	< 0.001
SNOOK/LiFFT	97.0	< 0.001 ^a	33.7	< 0.001
NIOSH/LiFFT	88.0	< 0.001 ^a	72.5	< 0.001
WISHA/LiFFT	96.3	< 0.001 ^a	30.9	< 0.001
KIM/LiFFT	80.3	< 0.001 ^a	76.1	< 0.001
Strain index/LiFFT	39.3	0.028 ^b	56.6	< 0.001
RULA/LiFFT	19.3	0.274	8.3	0.563
REBA/LiFFT	47.3	0.003 ^c	26.3	0.033
QEC/LiFFT	97.0	< 0.001 ^a	94.1	< 0.001
MAC/survival chance	72.2	< 0.001 ^a	47.9	< 0.001
SNOOK/survival chance	31.0	0.041	24.0	0.035
NIOSH/survival chance	72.2	< 0.001 ^a	47.9	< 0.001
WISHA/survival chance	47.6	< 0.001 ^a	31.8	0.010
KIM/survival chance	50.4	< 0.001 ^a	26.7	0.005
Strain index/survival chance	52.0	< 0.001 ^a	13.6	0.236
RULA/survival chance	86.6	< 0.001 ^a	48.8	< 0.001
REBA/survival chance	77.2	0.001 ^c	21.9	0.061
QEC/survival chance	31.0	0.041	6.3	0.550

^a P-value < 0.001.^b P-value < 0.05.^c P-value < 0.01.

motion analysis method used, which could differ from the one used in the current study.

Rapid upper limb assessment, REBA, and QEC identified none of the tasks as low risk (Figure 2). Rapid

Table 7. Limitations and Advantages of Tools and Methods Evaluated in the Study

Tools	Limitations	Advantages
3DSSPP	Need skills: Should be used for symmetrical activity	Considering anthropometric dimensions and sex; using different databases; simulation of activities
JACK	Requires great skills	Considering anthropometric dimensions and sex; using different databases; simulated activities, and greater accuracy are needed.
HCBCF	Should be used for symmetrical activity; not suitable for push/pull tasks	A simplistic quantitative method
MAC	Not suitable for push/pull tasks	A checklist for a quick initial assessment; considering environmental factors; assessment of individual and team carrying and lifting; including key elements of NIOSH
SNOOK	Designed according to psychophysical criteria	Can be evaluated for push/pull tasks
NIOSH	Neglecting worker characteristics, environmental conditions, and different populations and ethnicities. Seems to be conservative, and the basis of its design is 75% of the population of female workers. Its asymmetry coefficient needs to be re-examined. Not suitable for push/pull tasks	Requiring little training time. Its criteria are based on biomechanics, physiology, and psychology. Consider the type of task.
WISHA	It only aims to check the weight of the load. Not suitable for push/pull tasks	A checklist for quick initial assessment
KIM	It is not suitable for team load assessment	Ability to assess push/pull tasks; ability to assess lifting, holding, carrying, and manual functions; its criteria are based on biomechanics, physiology, and psychology.
Strain index	Accurate scoring of force is difficult in complex tasks.	Places greater emphasis on force. Correlation of SI score and carpal tunnel syndrome
RULA	If there are different postures, the assessor must decide which one should be checked or whether all the postures should be checked separately. Pays attention to the upper part of the body. If a frequent posture is slightly inappropriate, a low score may be calculated.	A quick assessment of tasks; having a good relationship with musculoskeletal disorders, and assessing the upper body posture
REBA	If there are different postures, the assessor must decide which one should be examined or whether all the postures should be checked separately.	Quick assessment of tasks; examining static and dynamic tasks; compared to RULA, examining coupling in the handling of loads
QEC	Since workers' comments must be recorded, the results may be biased. It provides little guidance on factors that need intervention.	With a quick review, it provides an initial list of factors to start the intervention. Requiring little training time. Considering workers' opinions. Assessment of static and dynamic activity
LiFFT	Injury estimation only in the waist; ignoring age, sex, and anthropometry	Ease of use; prediction of cumulative injury and risk of injury in single-task and multi-task activities; possibility of predicting the effect of the intervention; considering the weight of the load, frequency, and distance of the load from the body
Survival chance	It is established based on in vitro data: A multiplicative exponential equation.	Considering the magnitude and frequency of the load

upper limb assessment and REBA methods had a 77% correlation and a 74% agreement. These findings align with those of Chiasson et al., who reported an 82% agreement (46). There was no significant relationship between RULA and QEC methods, with a 43% correlation and a 31% agreement between REBA and QEC. In the study by Chiasson et al., these agreements were 45% and 46%, respectively (46). This could be attributed to the fact that in the QEC method, the questionnaire was completed by the worker, potentially introducing bias. In the study by Unver et al., the score of RULA was higher than that of QEC (56). Kee expressed that the risk levels assessed by RULA were more significantly associated with musculoskeletal disorders (57). Joshi and Deshpande hypothesized that REBA is more suitable for assessing loads of 5 to 10 kg, while RULA is better suited for loads greater than 10 kg; additionally, it was noted that there were postures where the assessment results were not sensitive and the assessment scores did not change (58). The strain index had the highest correlation with RULA (64.5%), while it had the lowest correlation with the REBA method (34.6%). This

discrepancy can be partly explained by the fact that both the strain index and the RULA method were developed for assessing upper limbs. Garg et al. noted that the strain index was appropriate for estimating the risk of musculoskeletal disorders of the hands but stated that when exposure increased, a higher risk was not observed (59). Body assessment methods revealed that the grinding task (task 2) posed a moderate risk due to the neck deviation from its neutral posture.

5.3. LiFFT and Survival Chance Tools

Lifting fatigue failure tool demonstrated a good correlation with manual materials handling methods but a lower correlation with body posture assessment methods. It required three variables as inputs, which are also crucial in MMH methods. The high correlation between LiFFT and the QEC methods could be due to the lower accuracy of the QEC method. Survival chance indicated that 66% of workers had no chance of survival, showing a good correlation with the RULA, REBA, NIOSH, and MAC methods. Survival chance reported a low risk

for the grinding activity because it focuses on loads on the lumbar disc and does not account for the force applied to the cervical disc. Therefore, this tool is not deemed suitable for assessing this activity. Survival chance calculates the force applied to the disc using biomechanical tools. Thus, it showed a moderate risk for this activity, considering the daily frequency of pushing activity. The results of assessing this tool for activities 1 and 3 (lifting) could be explained by considering the anthropometric differences among subjects.

The ergonomic methods used in this study feature specific and varied tables and final scores for determining risk levels. Consequently, to compare these tools, the raw scores were qualitatively categorized. Although the raw scores of the tools and methods were not identical, they were placed in the same qualitative category (Table 3 and Figure 2). In ergonomic risk assessment, it is crucial to account for static activities, transportation, movements of heavy objects, environmental conditions, and inappropriate body postures (60). Takala et al. (6) and Chiasson et al. (46) noted the difficulty in determining the best method for estimating the risk of musculoskeletal disorders. However, in industries with multiple risk factors, it is essential to select a method that addresses all these risks. Choosing the appropriate method and tool requires knowledge and awareness of their limitations and advantages, which could lead to more accurate musculoskeletal risk assessments (Table 7).

5.4. Limitations of the Study

This study faced several limitations. The primary limitation was the motion capture system used to obtain the relative joint angles (30, 61). Due to restrictions in the industry, only photography was feasible. Additionally, the sample size was relatively small for performing the risk assessments comprehensively. It is recommended that future studies involve larger sample sizes. Data were collected from six workstations involving 33 workers, but including a wider variety of tasks and postures could potentially enhance our findings and conclusions.

5.5. Conclusions

When recruiting workers, it is crucial to pay greater attention to physical and anthropometric characteristics. Suitable anthropometric characteristics can somewhat reduce the compressive and shear loads on the intervertebral discs. We utilized fourteen different methods and tools, each with specific applications, yet none were comprehensive enough to

assess the complex activities typically found in industry. Consequently, these activities require the use of appropriate tools and methods. Since biomechanical tools provide quantitative results and ergonomic methods yield more qualitative data, the purpose of the evaluation will dictate the choice between biomechanical tools and ergonomic methods.

Biomechanical tools offer detailed reports to assessors. Besides estimating compressive and shear forces on different limbs, JACK also provides fatigue and ergonomic analyses similar to those of NIOSH, RULA, or the energy expended by a simulated human model. These features are less prevalent in 3DSSPP. Ease of use and accuracy are vital factors in selecting biomechanical risk assessment tools, and experienced assessors can effectively utilize JACK, 3DSSPP, and HCBCF.

Identifying work environment risk factors and selecting the primary risk are crucial steps in choosing ergonomic methods. For assessing MMH activities, a combination of biomechanical tools and ergonomic methods is more suitable. For rapid assessments, ergonomic methods are beneficial. KIM-PP is preferred for pushing tasks. Depending on the task and environmental conditions, NIOSH is suitable for lifting loads, but MAC should be used in unsuitable conditions. According to injury risk results, KIM is more conservative and suitable for workplaces involving vulnerable individuals.

Studies on body posture assessments indicate that the relationship between RULA and musculoskeletal disorders is more significant, whereas REBA is used in situations involving gripping and dynamic activities. The strain index is appropriate for tasks involving repetitive hand activities. Quick exposure check is an effective starting point for interventions as it provides an initial risk list. It is important to clarify the concepts in the questions and supervise workers before they complete the form. Lifting fatigue failure tool showed good agreement with load-carrying methods, making it useful in assessing load-carrying, especially for multi-tasking and repetitive tasks. Survival chance had moderate agreement with NIOSH, RULA, and MAC, making it suitable for tasks assessed with these methods. Incorporating new technologies and refining the mentioned methods to include factors like sex, environmental conditions, and other relevant factors can enhance musculoskeletal disorder risk assessments. Despite the development of various methods, there is still a need for a novel method tailored to specific jobs, taking into account the corresponding risk factors.

Acknowledgements

This article is derived from a PhD thesis in ergonomics. We are grateful to the Deputy of Research and Technology at Hamadan University of Medical Sciences for their support and cooperation (No. 140010218629).

Footnotes

Authors' Contribution: Abouzar Eynipour: Participated in designing the study, writing of the original draft, data curation, task evaluations, writing, review, and editing; Navid Arjmand: Designing the study, writing, review, and editing; Iman Dianat: Supervision and review, review, and editing; Ali Reza Soltanian: Analysis and interpretation of data; Rashid Heidarimoghadam: Writing, data curation. All authors read and approved the final version of the article.

Conflict of Interests: There was no conflict of interest in writing this paper.

Data Availability: Data of the manuscript will be available upon request.

Ethical Approval: This article is based on a thesis approved by the Ethics Committee of Hamadan University of Medical Sciences (ethics code: IR.UMSHA.REC.1400.037).

Funding/Support: This article was a part of the PhD thesis in ergonomics. No funding was received for this article.

Informed Consent: Written informed consent was obtained from all participants.

References

1. Carrillo-Castrillo JA, Perez-Mira V, Pardo-Ferreira MDC, Rubio-Romero JC. Analysis of Required Investigations of Work-Related Musculoskeletal Disorders in Spain. *Int J Environ Res Public Health*. 2019;16(10). [PubMed ID: 31091722]. [PubMed Central ID: PMC6572086]. <https://doi.org/10.3390/ijerph16101682>.
2. Arghami S, Kalantari R, Ahmadi Kionani E, Zanjirani Farahani A, Kamrani M. Assessing Prevalence of Musculoskeletal Disorders in Women Workers in an Automobile Manufacturing Assembly Line. *J Hum Environ Health Promot*. 2016;1(2):75-9. <https://doi.org/10.29252/jhehp.1.2.75>.
3. Hoy D, March L, Brooks P, Blyth F, Woolf A, Bain C, et al. The global burden of low back pain: estimates from the Global Burden of Disease 2010 study. *Ann Rheum Dis*. 2014;73(6):968-74. [PubMed ID: 24665116]. <https://doi.org/10.1136/annrheumdis-2013-204428>.
4. Joshi M, Deshpande V. A systematic review of comparative studies on ergonomic assessment techniques. *Int J Ind Ergon*. 2019;74:102865. <https://doi.org/10.1016/j.ergon.2019.102865>.
5. Roman-Liu D, Groborz A, Tokarski T. Comparison of risk assessment procedures used in OCRA and ULRA methods. *Ergonomics*. 2013;56(10):1584-98. [PubMed ID: 24041375]. [PubMed Central ID: PMC4047617]. <https://doi.org/10.1080/00140139.2013.829923>.
6. Takala EP, Pehkonen I, Forsman M, Hansson GA, Mathiassen SE, Neumann WP, et al. Systematic evaluation of observational methods assessing biomechanical exposures at work. *Scand J Work Environ Health*. 2010;36(1):3-24. [PubMed ID: 19953213]. <https://doi.org/10.5271/sjweh.2876>.
7. Drinkaus P, Seseck R, Bloswick D, Bernard T, Walton B, Joseph B, et al. Comparison of ergonomic risk assessment outputs from Rapid Upper Limb Assessment and the Strain Index for tasks in automotive assembly plants. *Work*. 2003;21(2):165-72. [PubMed ID: 14501094].
8. Joseph C, Imbeau D, Nastasia I. Measurement consistency among observational job analysis methods during an intervention study. *Int J Occup Saf Ergon*. 2011;17(2):139-46. [PubMed ID: 21679665]. <https://doi.org/10.1080/10803548.2011.11076884>.
9. Pratiwi I, Nuriati HW. Ergonomic risk evaluation to minimize musculoskeletal disorders of workers at batik cap industry. *J Sistem Manaj Ind*. 2022;6(2):176-86. <https://doi.org/10.30656/jsmi.v6i2.5043>.
10. Mohamad Rawan MR, Mohd Daril MA, Subari K, Abdul Wahab MI. A Comparative Studies of Ten Ergonomics Risk Assessment Methods. In: Ismail A, Mohd Daril MA, Öchsner A, editors. *Advanced Transdisciplinary Engineering and Technology: Advanced Structured Materials*. Vol. 174. Cham: Springer; 2022. p. 153-69. https://doi.org/10.1007/978-3-031-01488-8_15.
11. Denis D, St-Vincent M, Jetté C, Nastasia I, Imbeau D. *[Intervention practices relating to the prevention of musculoskeletal disorders: a critical review of the literature]*. 2005. French. Available from: <https://www.irsst.qc.ca/media/documents/PubIRSST/B-066.pdf?v=2024-04-20>.
12. Li G, Buckle P. Quick Exposure Checklist (QEC) for the Assessment of Workplace Risks for Work-Related Musculoskeletal Disorders (WMSDs). In: Stanton NA, Hedge A, Brookhuis K, Salas E, Hendrick HW, editors. *Handbook of Human Factors and Ergonomics Methods*. Boca Raton: CRC Press; 2005. p. 6.1-10. <https://doi.org/10.1201/9780203489925.ch6>.
13. Hignett S, McAtamney L. Rapid entire body assessment (REBA). *Appl Ergon*. 2000;31(2):201-5. [PubMed ID: 10711982]. [https://doi.org/10.1016/s0003-6870\(99\)00039-3](https://doi.org/10.1016/s0003-6870(99)00039-3).
14. McAtamney L, Nigel Corlett E. RULA: a survey method for the investigation of work-related upper limb disorders. *Appl Ergon*. 1993;24(2):91-9. [PubMed ID: 15676903]. [https://doi.org/10.1016/0003-6870\(93\)90080-s](https://doi.org/10.1016/0003-6870(93)90080-s).
15. Moore JS, Garg A. The Strain Index: a proposed method to analyze jobs for risk of distal upper extremity disorders. *Am Ind Hyg Assoc J*. 1995;56(5):443-58. [PubMed ID: 7754975]. <https://doi.org/10.1080/15428119591016863>.
16. Monnington SC, Quarrie CJ, Pinder ADJ, Morris LA. Development of manual handling assessment charts (mac) for health and safety inspectors. In: McCabe PT, editor. *Contemporary Ergonomics*. London: Taylor & Francis; 2003. p. 2-8.
17. Snook SH, Ciriello VM. The design of manual handling tasks: revised tables of maximum acceptable weights and forces. *Ergonomics*. 1991;34(9):1197-213. [PubMed ID: 1743178]. <https://doi.org/10.1080/00140139108964855>.
18. Waters TR, Putz-Anderson V, Garg A, Fine LJ. Revised NIOSH equation for the design and evaluation of manual lifting tasks. *Ergonomics*. 1993;36(7):749-76. [PubMed ID: 8339717]. <https://doi.org/10.1080/00140139308967940>.
19. Lowe BD, Dempsey PG, Jones EM. Ergonomics assessment methods used by ergonomics professionals. *Appl Ergon*. 2019;81:102882. [PubMed ID: 31422255]. <https://doi.org/10.1016/j.apergo.2019.102882>.
20. Middlesworth M. *A Step-by-Step Guide to the WISHA Lifting Calculator*. 2019. Available from: <https://ergo-plus.com/wisha-lifting-calculator-guide/>.

21. Steinberg U. New tools in Germany: development and appliance of the first two KIM ("lifting, holding and carrying" and "pulling and pushing") and practical use of these methods. *Work*. 2012;41 Suppl 1:3990-6. [PubMed ID: 2231733]. <https://doi.org/10.3233/WOR-2012-0698-3990>.

22. Grootenhuis WJA, Johansson E. Observational Methods for Assessing Ergonomic Risks for work-related musculoskeletal disorders. A Scoping Review. *Revista Ciencias de la Salud*. 2018;16(Especial):8-38. <https://doi.org/10.12804/revistas.urosario.edu.co/revsalud/a.6840>.

23. Genaidy AM, Al-Shedi AA, Karwowski W. Postural stress analysis in industry. *Appl Ergon*. 1994;25(2):77-87. [PubMed ID: 15676953]. [https://doi.org/10.1016/0003-6870\(94\)90068-x](https://doi.org/10.1016/0003-6870(94)90068-x).

24. Kilbom Å. Repetitive work of the upper extremity: Part II — The scientific basis (knowledge base) for the guide. *Int J Ind Ergon*. 1994;14(1-2):59-86. [https://doi.org/10.1016/0169-8141\(94\)90006-x](https://doi.org/10.1016/0169-8141(94)90006-x).

25. Li G, Buckle P. Current techniques for assessing physical exposure to work-related musculoskeletal risks, with emphasis on posture-based methods. *Ergonomics*. 1999;42(5):674-95. [PubMed ID: 10327891]. <https://doi.org/10.1080/001401399185388>.

26. Diego-Mas JA, Alcaide-Marzal J, Poveda-Bautista R. Errors Using Observational Methods for Ergonomics Assessment in Real Practice. *Hum Factors*. 2017;59(8):1173-87. [PubMed ID: 28783375]. <https://doi.org/10.1177/0018720817723496>.

27. Mahboobi M, Taghipour M, Ali Azadeh M. Assessing ergonomic risk factors using combined data envelopment analysis and conventional methods for an auto parts manufacturer. *Work*. 2020;67(1):113-28. [PubMed ID: 32986638]. <https://doi.org/10.3233/WOR-203257>.

28. Caputo F, Greco A, Fera M, Macchiaroli R. Workplace design ergonomic validation based on multiple human factors assessment methods and simulation. *Prod Manuf Res*. 2019;7(1):195-222. <https://doi.org/10.1080/21693277.2019.1616631>.

29. Ghezelbasi F, Shirazi-Adl A, Plamondon A, Arjmand N. Comparison of different lifting analysis tools in estimating lower spinal loads - Evaluation of NIOSH criterion. *J Biomech*. 2020;112:110024. [PubMed ID: 32961423]. <https://doi.org/10.1016/j.jbiomech.2020.110024>.

30. Asadi F, Arjmand N. Marker-less versus marker-based driven musculoskeletal models of the spine during static load-handling activities. *J Biomech*. 2020;112:110043. [PubMed ID: 32950760]. <https://doi.org/10.1016/j.jbiomech.2020.110043>.

31. The University of Michigan Center for Ergonomics. *3D Static Strength Prediction Program User's Manual*. Ann Arbor, MI: The University of Michigan; 2014.

32. Raschke U, Cort C. Siemens Jack. In: Scataglini S, Paul G, editors. *DHM and Posturography*. London: Academic Press; 2019. p. 35-48. <https://doi.org/10.1016/B978-0-12-816713-7.00003-9>.

33. Hall AD, La Delfa NJ, Loma C, Potvin JR. A comparison between measured female linear arm strengths and estimates from the 3D Static Strength Prediction Program (3DSSPP). *Appl Ergon*. 2021;94:103415. [PubMed ID: 33799124]. <https://doi.org/10.1016/j.apergo.2021.103415>.

34. Merryweather AS, Loertscher MC, Bloswick DS. A revised back compressive force estimation model for ergonomic evaluation of lifting tasks. *Work*. 2009;34(3):263-72. [PubMed ID: 20037241]. <https://doi.org/10.3233/WOR-2009-0924>.

35. Gallagher S, Seseck RF, Schall Jr MC, Huangfu R. Development and validation of an easy-to-use risk assessment tool for cumulative low back loading: The Lifting Fatigue Failure Tool (LiFFT). *Appl Ergon*. 2017;63:142-50. [PubMed ID: 28477843]. <https://doi.org/10.1016/j.apergo.2017.04.016>.

36. Coenen P, Kingma I, Boot CR, Bongers PM, van Dieen JH. The contribution of load magnitude and number of load cycles to cumulative low-back load estimations: a study based on in-vitro compression data. *Clin Biomech (Bristol, Avon)*. 2012;27(10):1083-6. [PubMed ID: 22877832]. <https://doi.org/10.1016/j.clinbiomech.2012.07.010>.

37. Regazzoni D, Rizzi C. Digital Human Models and Virtual Ergonomics to Improve Maintainability. *Computer-Aided Design and Applications*. 2013;11(1):10-9. <https://doi.org/10.1080/16864360.2013.834130>.

38. Feyen R, Liu Y, Chaffin D, Jimmerson G, Joseph B. Computer-aided ergonomics: a case study of incorporating ergonomics analyses into workplace design. *Appl Ergon*. 2000;31(3):291-300. [PubMed ID: 10855452]. [https://doi.org/10.1016/s0003-6870\(99\)00053-8](https://doi.org/10.1016/s0003-6870(99)00053-8).

39. Chang SW, Wang MJ. Digital human modeling and workplace evaluation: Using an automobile assembly task as an example. *Hum Factors Ergon Manuf Serv Ind*. 2007;17(5):445-55. <https://doi.org/10.1002/hfm.20085>.

40. Polášek P, Bureš M, Šimon M. Comparison of Digital Tools for Ergonomics in Practice. *Procedia Eng*. 2015;100:1277-85. <https://doi.org/10.1016/j.proeng.2015.01.494>.

41. Sun X, Houssin R, Renaud J, Gardoni M. A review of methodologies for integrating human factors and ergonomics in engineering design. *Int J Prod Res*. 2019;57(15-16):4961-76. <https://doi.org/10.1080/00207543.2018.1492161>.

42. De Magistris G, Micaelli A, Savin J, Gaudez C, Marsot J. Dynamic digital human models for ergonomic analysis based on humanoid robotics techniques. *Int J Digit Hum*. 2015;1(1):81. <https://doi.org/10.1504/ijdh.2015.067135>.

43. Wang D, Dai F, Ning X. Risk Assessment of Work-Related Musculoskeletal Disorders in Construction: State-of-the-Art Review. *J Constr Eng Manag*. 2015;141(6). [https://doi.org/10.1061/\(asce\)co.1943-7862.0000979](https://doi.org/10.1061/(asce)co.1943-7862.0000979).

44. Roman-Liu D. Comparison of concepts in easy-to-use methods for MSD risk assessment. *Appl Ergon*. 2014;45(3):420-7. [PubMed ID: 23849897]. <https://doi.org/10.1016/j.apergo.2013.05.010>.

45. Sukadarin EH, Deros BM, Ghani JA, Mohd Nawi NS, Ismail AR. Postural assessment in pen-and-paper-based observational methods and their associated health effects: a review. *Int J Occup Saf Ergon*. 2016;22(3):389-98. [PubMed ID: 27173135]. <https://doi.org/10.1080/10803548.2016.1156924>.

46. Chiasson MÈ, Imbeau D, Aubry K, Delisle A. Comparing the results of eight methods used to evaluate risk factors associated with musculoskeletal disorders. *Int J Ind Ergon*. 2012;42(5):478-88. <https://doi.org/10.1016/j.ergon.2012.07.003>.

47. Kee D. An empirical comparison of OWAS, RULA and REBA based on self-reported discomfort. *Int J Occup Saf Ergon*. 2020;26(2):285-95. [PubMed ID: 31941428]. <https://doi.org/10.1080/10803548.2019.1710933>.

48. Rajaei MA, Arjmand N, Shirazi-Adl A, Plamondon A, Schmidt H. Comparative evaluation of six quantitative lifting tools to estimate spine loads during static activities. *Appl Ergon*. 2015;48:22-32. [PubMed ID: 25683528]. <https://doi.org/10.1016/j.apergo.2014.11.002>.

49. Gunther P, Lee WC. Interfacing Jack And anybody: Towards anthropometric musculoskeletal digital human modeling. In: Wang X, Bubb H, editors. *1st International Symposium on Digital Human Modeling*. France. 2011. p. 1-8.

50. Jones T, Kumar S. Comparison of ergonomic risk assessment output in four sawmill jobs. *Int J Occup Saf Ergon*. 2010;16(1):105-11. [PubMed ID: 20331923]. <https://doi.org/10.1080/10803548.2010.11076834>.

51. McGill S, Norman R, Yingling V, Wells R, Neumann W. Shear Happens! Suggested guidelines for ergonomists to reduce the risk of low back injury from shear loading. *The 30th Annual Conference of the Human Factors Association of Canada (HFAC)*. Mississauga, Ontario, Canada. 1998. p. 157-61.

52. Mesquita CC, Ribeiro JC, Moreira P. Portuguese version of the standardized Nordic musculoskeletal questionnaire: cross cultural

and reliability. *J Public Health*. 2010;18(5):461-6. <https://doi.org/10.1007/s10389-010-0331-0>.

53. McCauley Bush P, Gaines S, Gammoh F, Woode S. A Comparison of Software Tools for Occupational Biomechanics and Ergonomic Research. In: Nunes IL, editor. *Ergonomics - A Systems Approach*. London: IntechOpen; 2012. p. 65-118. <https://doi.org/10.5772/39201>.
54. Abedini R, Choobineh A, Soltanzadeh A, Gholami M, Amiri F, Almasi Hashyani A. Ergonomic Risk Assessment of Lifting Activities; a Case Study in a Rubber Industry. *Jundishapur J Health Sci*. 2013;5(1):e93993.
55. Asadi N, Choobineh A, Keshavarzi S, Daneshmandi H. A Comparative Assessment of Manual Load Lifting Using NIOSH Equation and WISHA Index Methods in Industrial Workers of Shiraz City. *J Health Sci Surveill Syst*. 2015;3(1):8-12.
56. Unver S, Acar H, Kaya A. Determination of Work Postures with Different Ergonomic Risk Assessment Methods in Forest Nurseries. *Fresenius Environ Bull*. 2017;26(12):7362-71.
57. Kee D. Systematic Comparison of OWAS, RULA, and REBA Based on a Literature Review. *Int J Environ Res Public Health*. 2022;19(1): [PubMed ID: 35010850]. [PubMed Central ID: PMC8744662]. <https://doi.org/10.3390/ijerph19010595>.
58. Joshi M, Deshpande V. Study of association between OWAS, REBA and RULA with perceived exertion rating for establishing applicability. *Theor Issues Ergon Sci*. 2022;23(3):313-32. <https://doi.org/10.1080/1463922x.2021.1958951>.
59. Garg A, Kapellusch J, Hegmann K, Wertsch J, Merryweather A, Deckow-Schaefer G, et al. The Strain Index (SI) and Threshold Limit Value (TLV) for Hand Activity Level (HAL): risk of carpal tunnel syndrome (CTS) in a prospective cohort. *Ergonomics*. 2012;55(4):396-414. [PubMed ID: 22397385]. <https://doi.org/10.1080/00140139.2011.644328>.
60. Li X, Güll M, Al-Hussein M. An improved physical demand analysis framework based on ergonomic risk assessment tools for the manufacturing industry. *Int J Ind Ergon*. 2019;70:58-69. <https://doi.org/10.1016/j.ergon.2019.01.004>.
61. Caldas R, Mundt M, Potthast W, Buarque de Lima Neto F, Markert B. A systematic review of gait analysis methods based on inertial sensors and adaptive algorithms. *Gait Posture*. 2017;57:204-10. [PubMed ID: 28666178]. <https://doi.org/10.1016/j.gaitpost.2017.06.019>.